

LX Series

- Real Time monitoring
- Easy and fast implementation
- Low maintenance cost
- DTMF – ContractID, AdemcoExpress
- PC programmable – RS232
- Inputs and outputs configurable
- Higher object and people safety



We also offer dedicated OSM.2007 software to provide full capabilities of the LX transmitters abilities.

TRINITY
TELECOMMS

23 Fountain Road, Beverly, Sandton
P O Box 69560, Bryanston, 2021
Tel: +27 11 465-7377 Fax: +27 11 705-2614
E-mail: equiries@trintel.co.za
www.trintel.co.za

Strong market position since 1989 Specialized in the area of data transmission and electronic security systems
Advanced technologies
Modern production lines
ISO 9001 Certified
OEM/ODM production
Reliable business partner

LX Series



Real Time GPRS transmitter

LX Series

- Real time GPRS/GSM transmission
- Easy remote configuration via GPRS, SMS or Voice Channel
- Easy implementation DTMF: ContactID, AdemcoExpress
- Compatible with all of the most popular alarm systems
- AES (Advanced Encryption Standard) data encryption
- Ability to send text messages to defined private mobile phones

Reliable M2M communication...

Modern and universal equipment developed for permanent and real time communication between alarm systems and Monitoring Station or other M2M solutions.

Wide range of applications

- Real time M2M communication
- Alarm systems monitoring
- Monitoring and remote control of meteorological measurement systems
- Vending machines monitoring
- Meter reader remote control
- Consumption counters monitoring (e.g. power consumption counters)

Technical data:


power supply	12-14 V DC
current consumption	90 mA / max. 500 mA
case dimensions	225x225x70 mm
PCB main board dimensions	1300x72x23 mm
working temperature	-25 °C ÷ +70 °C
max. humidity	60%

Inputs – signal sources monitored Output – steering outputs

Available LX models:

LX model	inputs	outputs	RS	DTMF
LX 10	9	2	-	-
LX 20	5	2	+	+

DTMF: Contact ID Ademco Express 4/2

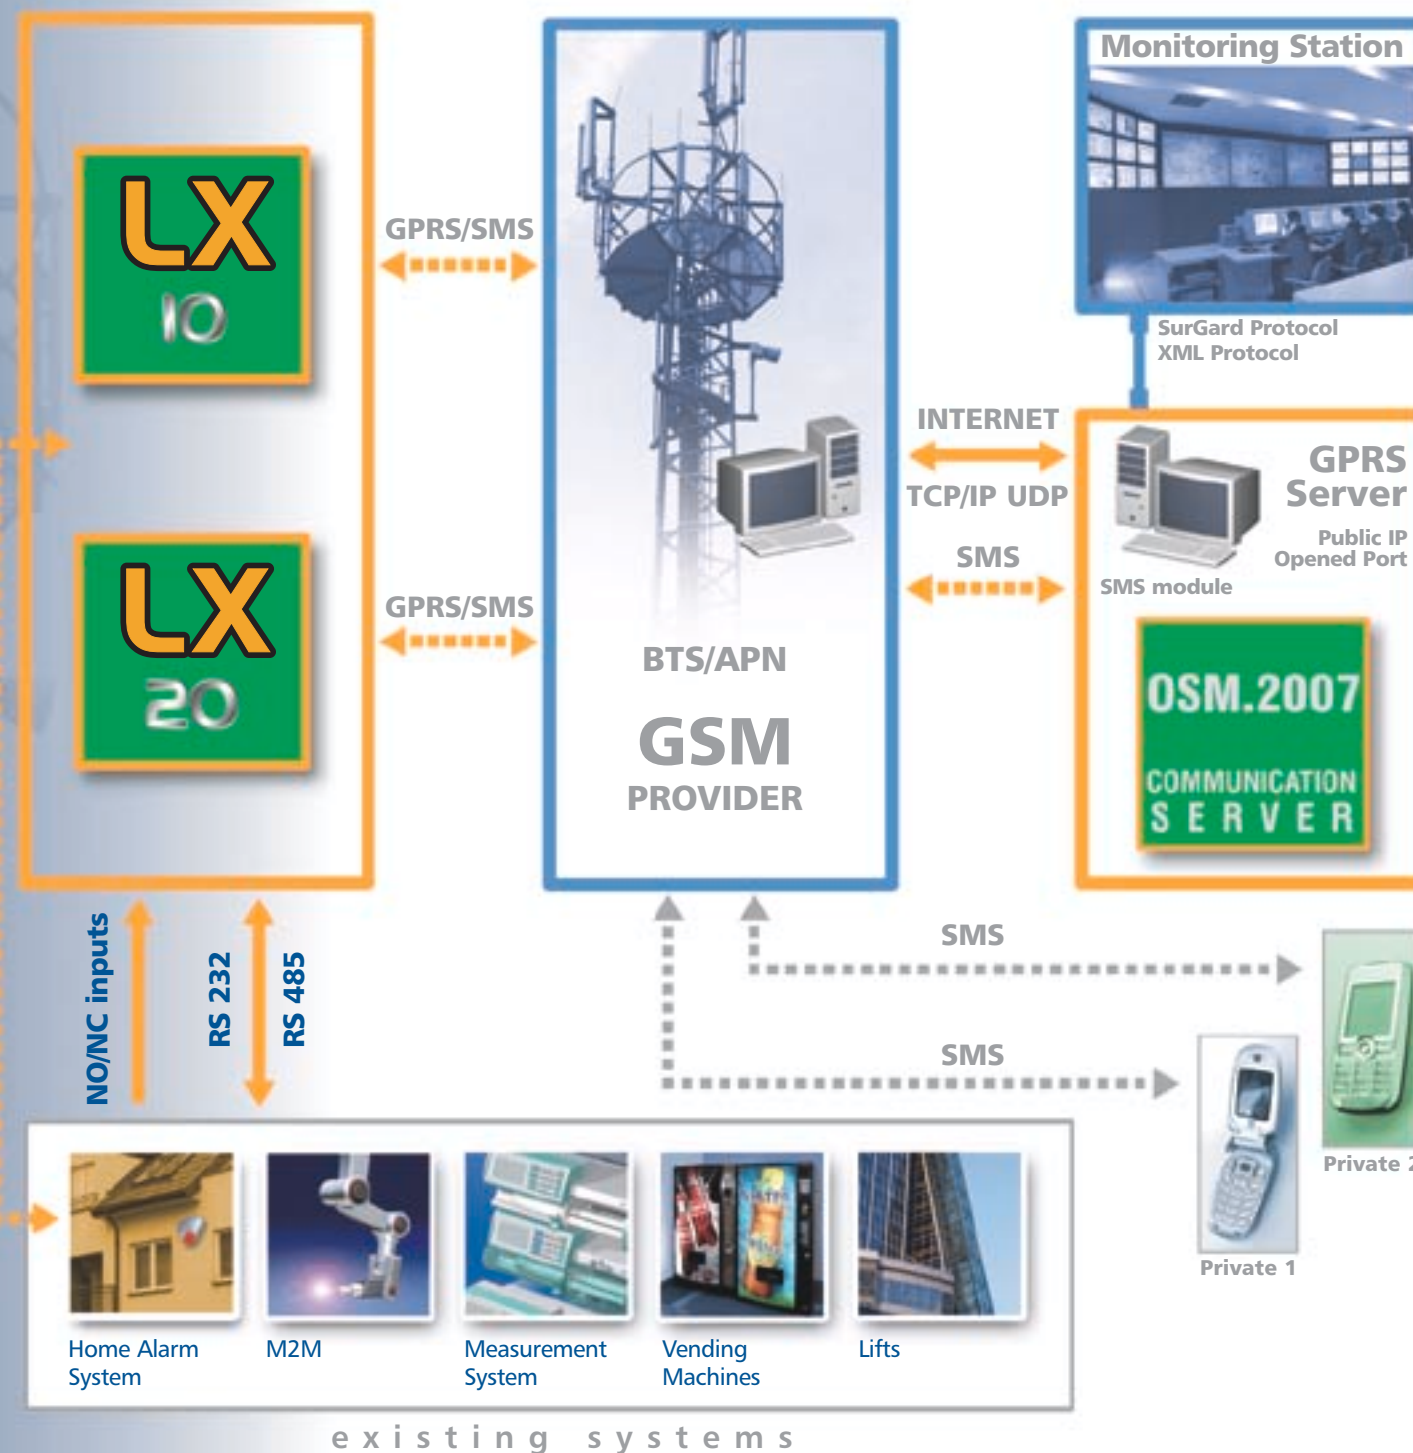

existing systems