

## PX Series

- Real Time monitoring
- Easy and fast implementation
- Low maintenance cost
- DTMF – ContractID, AdemcoExpress
- PC programmable – RS232
- Inputs and outputs configurable
- Higher object and people safety



We also offer dedicated OSM.2007 software to provide full capabilities of the PX transmitters abilities.

**TRINITY**  
TELECOMMS

23 Fountain Road, Beverly, Sandton  
P O Box 69560, Bryanston, 2021  
Tel: +27 11 465-7377 Fax: +27 11 705-2614  
E-mail: [equiries@trintel.co.za](mailto:equiries@trintel.co.za)  
[www.trintel.co.za](http://www.trintel.co.za)

Strong market position since 1989 Specialized  
in the area of data transmission and electronic  
security systems  
Advanced technologies  
Modern production lines  
ISO 9001 Certified  
OEM/ODM production  
Reliable business partner

# PX Series



## Real Time GPRS transmitter

# PX Series

- Real time GPRS/GSM transmission
- Ability of two-way voice connection
- Easy implementation DTMF: ContactID, AdemcoExpress
- Compatible with all of the most popular alarm systems
- Easy programming: RS232
- "Polish Master Of Alarm Technique" Prize

## Reliable M2M communication...

Modern and universal equipment developed for permanent and real time communication between alarm systems and Monitoring Station or other M2M solutions.

## Wide range of applications

- Real time M2M communication
- Alarm systems monitoring
- Monitoring and remote control of meteorological measurement systems
- Vending machines monitoring
- Meter reader remote control
- Consumption counters monitoring (for instance power consumption counters)
- Elevator/lift monitoring and energy communication

### Technical data:


|                           |                     |
|---------------------------|---------------------|
| power supply              | AC 230 (+10%; -15%) |
| main board supply         | 14 V AC 25 VA       |
| battery                   | 12 V / 7 Ah         |
| current consumption       | 60 mA / max. 1,2 A  |
| case dimensions           | 225x225x70 mm       |
| PCB main board dimensions | 139x71x30 mm        |
| working temperature       | -25 °C ÷ +70 °C     |
| max. humidity             | 60%                 |

Inputs – signal sources monitored      Output – steering outputs

### Available PX models:

| PX model | inputs | outputs | RS | DTMF | Voice |
|----------|--------|---------|----|------|-------|
| 100 A    | 8      | 2       | +  | -    | -     |
| 200 A    | 8      | 2       | +  | +    | -     |
| 300 A    | 8      | 2       | +  | -    | +     |

DTMF: Contact ID Ademco Express 4/2

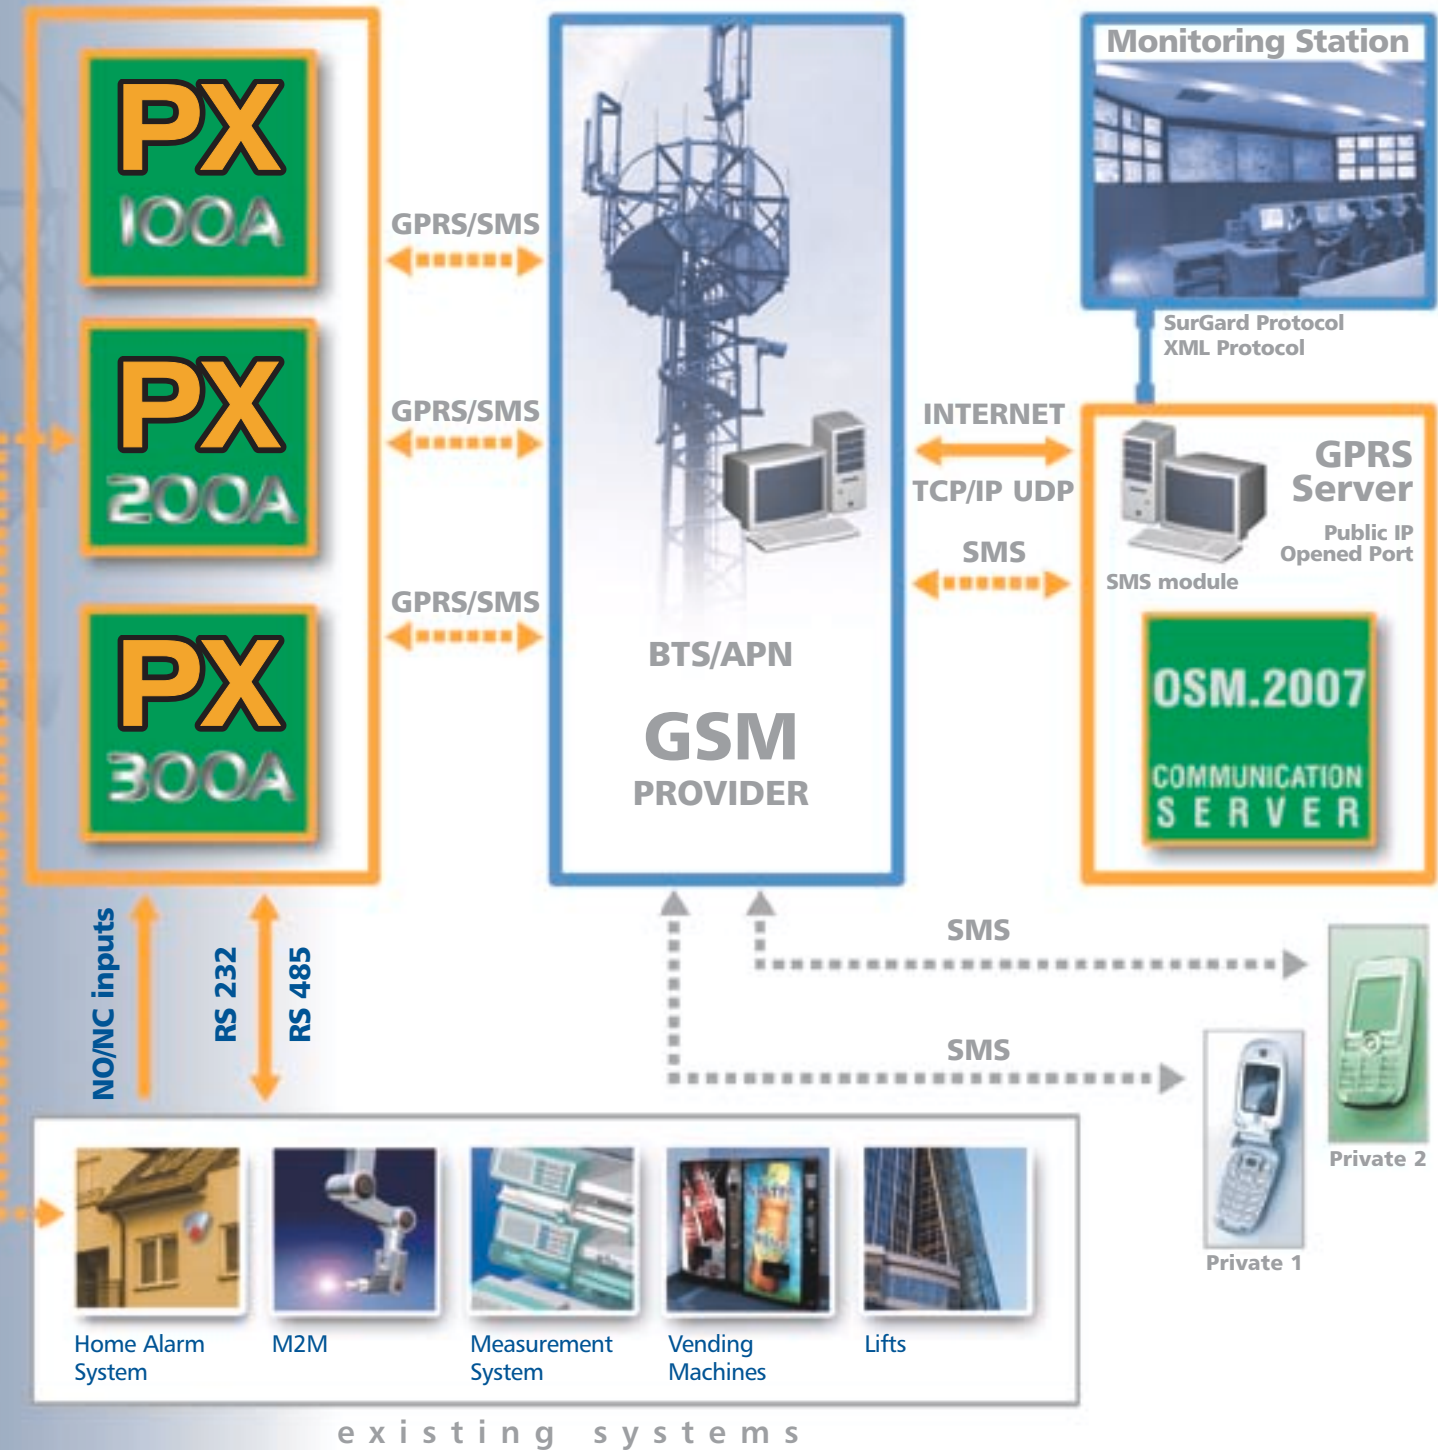

existing systems